


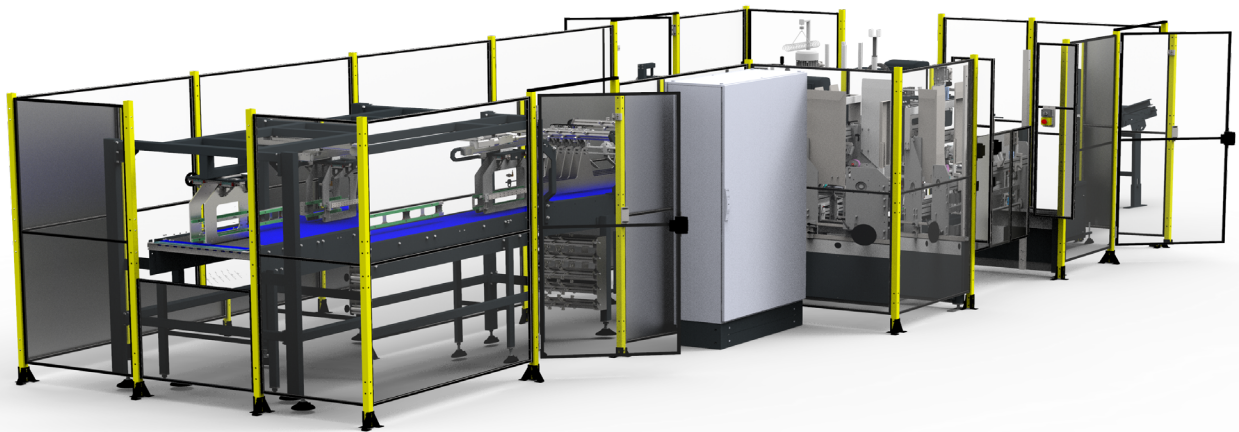

## Wrap-Around Case Packer **Swing 250**

Wrap-around case packer from die-cut blank with hot melt glue sealing. The grouping and loading system are customized for each type of product and box.

| MODEL                             |            | SWING                         | SWING 250                      |
|-----------------------------------|------------|-------------------------------|--------------------------------|
| Max. output                       | cases/min. | Up to 8 (depending on format) | Up to 20 (depending on format) |
| Max. box dimensions (external)    | L mm       | 500                           | 350                            |
|                                   | W mm       | 300                           | 500                            |
|                                   | H mm       | 300                           | 320                            |
| Min. box dimensions (external)    | L mm       | 200                           | 150                            |
|                                   | W mm       | 100                           | 200                            |
|                                   | H mm       | 150                           | 85                             |
| Available bottom closures         |            | cola                          | cola                           |
| TECHNICAL DATA                    |            |                               |                                |
| Dimensions                        | L mm       | 4150                          | 6647                           |
|                                   | W mm       | 2185                          | 3891                           |
|                                   | H mm       | 2300                          | 2300                           |
| Carton magazine capacity          |            | 100 (depending on format)     | 200-500 (depending on format)  |
| SERVICE                           |            |                               |                                |
| Electrical voltage                |            | 400V III+T+N                  | 400V III+T+N                   |
| Installed power                   | kW         | 10                            | 8                              |
| Power consumption                 | kWh        | 7                             | 6                              |
| Air pressure                      | bar        | 6                             | 6                              |
| Air consumption                   | l/cycle    | 60                            | 60                             |
| OPTIONS                           |            |                               |                                |
| Version in INOX 304               |            | O                             | O                              |
| Continuous product infeed divider |            | O                             | O                              |