


Tech_M

THE PACKAGING MACHINERY BRAND

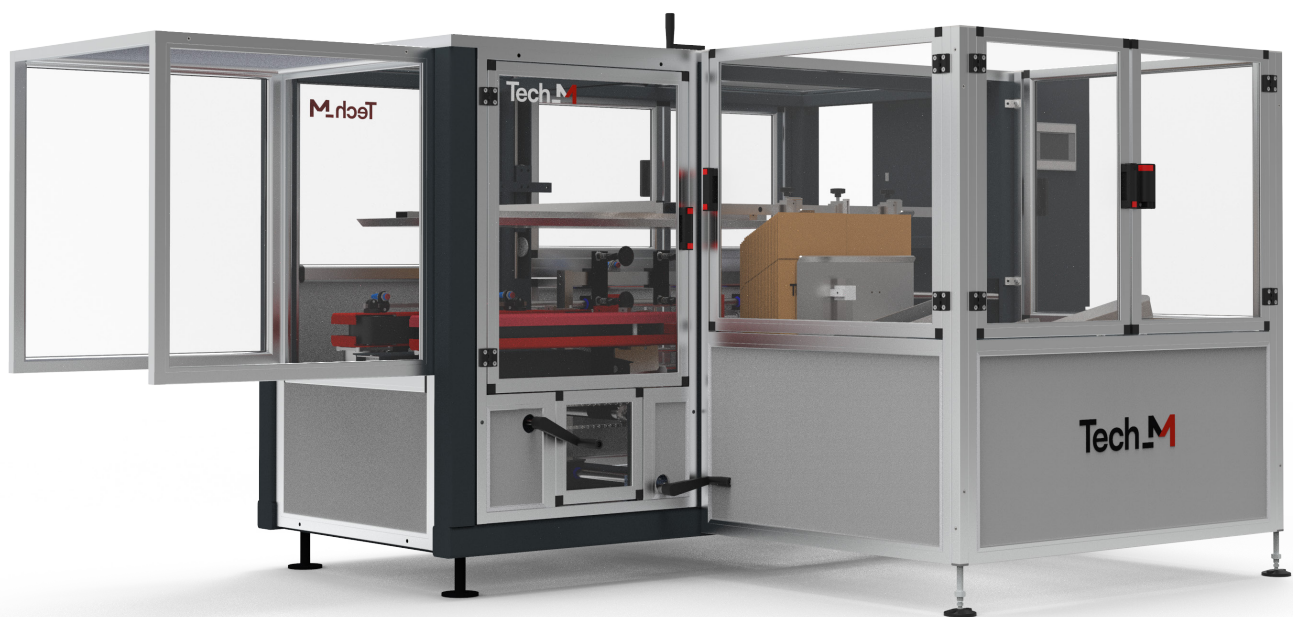

Case Erectors

BEM200

BEM200xs

The automatic case erectors BEM200 and BEM200xs include a gravity magazine for folded boxes, a system to open them, close the bottom flaps, seal the bottom and deliver the assembled case with the bottom closed, ready for vertical product filling. Easy to operate and adjust, they feature a touch screen to simplify the user's work. Maximum precision in every movement ensures high productivity and quality.



THE PACKAGING MACHINERY BRAND

MODEL		BEM 200	BEM 200xs
Max. output	cases/ min	12	11
Max. box dimensions (outer dimensions)	L mm	530	300
	W mm	400	250
	H mm	600	370
Min. box dimensions (outer dimensions)	L mm	250	150
	W mm	150	120
	H mm	225	190
Accepted box types		RSC, HSC, FEFCO 0200/0201	RSC, HSC, FEFCO 0200/0201
Available bottom closures		tape, hot melt glue	tape, hot melt glue
TECHNICAL DATA			
Weight	kg	400	250
Dimensions	L mm	3510	2375
	W mm	1950	1956
	H mm	1460	1210
Gravity magazine capacity	cases	120	120
Working height	mm	630-750	630-750
SERVICE			
Electrical voltage		230 V II+T	230 V II+T
Installed power	kW	0,5	0,5
Electrical consumption	kW/h	0,4	0,4
Air pressure	bar	6	6
Air consumption	l/cycle	29	25
OPTIONS			
Motorized magazine		O	O
Stainless steel		O	O